

SPECIFICATIONS UNIT **Plant Capacity** m³/h 1 Mixer Specifications m³/h 1500 Dry Filling Volume Liter **Mixer Specifications** 1000 Compacted Concrete Liter 2x22 Motor Power kW 2500 Aggregate Weighing Capacity 500 Cement Weighing Capacity kg **Weighing Bin Capacity** Water Weighing Capacity kg 250 Additive Weighing Capacity kg 20 Piece 4-5 Aggregate Compartments **Aggregate Bin** Bin Capacity 20-30 Aggregate Weighing Capacity kg 6000 800 mm Width **Transfer Belts** mm 28000 Length kW 22 Motor Power 219 Ø Diameter **Cement Screw Conveyor** mm 11500 Length 1 kW Motor Power bar 6-8 Pressure Liter 500 Air Tank **Air Compressor** L/dk 1013 Store House kW 5,5 Motor Power Weight ton 45 kW **Total Power** 125 **Transport Type** 4 Container



ANAVARZA STATIONARY 60 M³ CONCRETE **BATCHING PLANT**







*The front surface reducer part of the mixer can be opened easily. In this case, maintenance operations can be carried out more easily.





*Planetary reducer is used. *2*22 kW motor is used.





*Mixer SKF brand automatic and manual lubrication is available.



stop button that may occur switches are available. regarding the mixer.





*There is an emergency *3 pieces telemechanical *Hydraulic unit is available.




















*Mixer wear-resistant parts are made of Ni-hard material.



*Mixer, mixer and scraper arm group is made of Ni-hard material.



*Mixer bearing part is available.



*Mixer lower pouring chute is available.



*Mixer upper cover part is available.

OUR TRANSFER CONVEYOR QUALITY



*Drum coating is available.



*KR type reducer is used.



*Pear-shaped gearbox available.



*2*55 kW motor is used.



*Guide roller part is available.



*SNL bearing type is used.



*Rope switch is used.



*Galvanized coating available.












OUR WEIGHING LAYER QUALITY

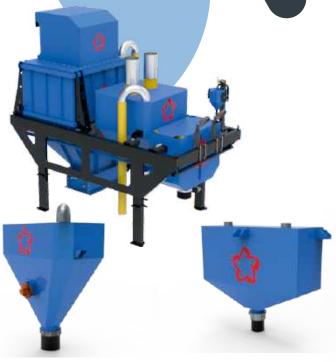



*Aggregate weighing bin is available. *Cement weighing bin is available.

*Water weighing bin is available. *Katkı tartı bunkeri mevcuttur.





*Vibromotor is available.



*The valves with flap and actuators are available



*1" ball valve with actuator is available.



*Pnömatik kontrollü piston mevcuttur.

*The valves with flap and actuators are available

OUR AGGREGATE BIN QUALITY









*Aggreagate weighing bin is available





*Aggregate pouring chute is available.



*Vibromotor is available.





























*Drum coating is available.*KR type reducer is used.*Rope switch is used.



OUR PLANT EQUIPMENT



*Guide roller part is available. *SNL bearing type is used.

MIXER POURING CHUTE



*Since the mixer pouring chute is bolted, it provides ease of maintenance.



*0.75 kW single stage *3" valve with butterfly additive pump is available. actuator is available.





*Dalgakiran compressor is available.

CABIN AND AUTOMATION



*Dimension(mm):2000x2000x3000 *PVC System (Insulating Glass) Insulation, Walls polystyrene foam, ceiling glass wool



*Siemens/ABB Switching material *Omron/PLC *Laptop


*Manual Control (Mimic)


*Air conditioner: Available (9000 btu)





SETTLEMENT PLAN

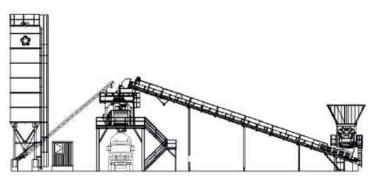

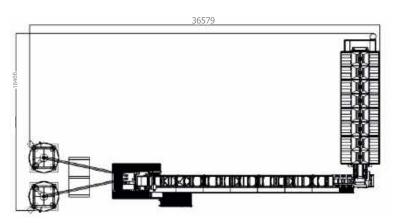

TRANSPORT PLAN

