

| ihtiya | CINIZA ÖZEL ÇÖZÜMLER İÇİN | | | |
|-----------------------|-----------------------------|-------|-------|--|
| | SPECIFICATIONS | UNIT | | |
| | Plant Capacity | m³/h | 100 | |
| | Mixer Specifications | m³/h | 2 | |
| Mixer Specifications | Dry Filling Volume | Liter | 3000 | |
| | Compacted Concrete | Liter | 2000 | |
| | Motor Power | kW | 2x37 | |
| | Cement Weighing Capacity | kg | 2,5 | |
| Weighing Bin Capacity | Water Weighing Capacity | kg | 700 | |
| | Additive Weighing Capacity | kg | 20 | |
| | Aggregate Compartments | Piece | 4-5 | A ALA BURKERS |
| Aggregate Bin | Bin Capacity | 3 | 20-30 | |
| | Aggregate Weighing Capacity | kg | 6000 | |
| | Width | mm | 1000 | |
| Transfer Belts | Length | mm | 18000 | |
| | Motor Power | kW | 22 | |
| | Diameter | Ø | 273 | |
| Cement Screw Conveyor | | mm | 11500 | |
| | Motor Power | kW | 15 | |
| | Pressure | bar | 6-8 | _ |
| Air Compressor | Air Tank | Liter | 500 | CODDÍON |
| | Store House | L/dk | 1013 | GORDION |
| | Motor Power | kW | 5,5 | |
| Weight | | ton | 52 | STATIONARY 100 M ³ DRY-WET CONCRETE |
| Total Power | | kW | 160 | STATIONART TOU ME DRI-WET CONCRETE |
| Transport Type | 4 Container | | | BATCHING PLANT |
| | | | | |









*Mixer SKF brand automatic and manual lubrication is available.

stop button that may occur switches are available. regarding the mixer.

*There is an emergency *3 pieces telemechanical *Hydraulic unit is available.

 $^{\ast}\mbox{The}$ front surface reducer part of the mixer can be opened easily. In this case, maintenance operations


*Planetary reducer is used. *2*55 kW motor is used.




CONTACT US!

UMMAN A.Ş

can be carried out more easily.





**Mixer wear-resistant parts are made of Ni-hard material.



*Mixer, mixer and scraper arm group is made of Ni-hard material.



*Mixer bearing part is available.



*Mixer lower pouring chute is available.

*Mixer upper cover part is available.

OUR TRANSFER CONVEYOR QUALITY



*Drum coating is available.











*Guide roller part is available. *SNL bearing type is used.*Rope switch is used.

TWO-WAY DIVERTER FLAP VALVE



OUR WEIGHING LAYER QUALITY






*Cement weighing bin is available.

*Vibromotor is available.

*The valves with flap and actuators are available




*Water weighing bin is available.



*The valves with flap and actuators are available

OUR AGGREGATE BIN QUALITY





*Aggregate bin covers are available.

*Aggreagate weighing bin is available



*Vibromotor is available.



*Aggregate pouring chute is available.

*Vibromotor is available.



*Pneumatic controlled piston available.



Aggregate weighing bunker is available



CONTACT US!

 Phone : +90 312 394 19 90
Fax: +90 312 394 19 94 UMMAN A.Ş. Address:İvedik O.S.B 1341.0 No:71 Yenimahalle / ANKAR





*Drum coating is available.*KR type reducer is used.*Rope switch is used.



OUR PLANT EQUIPMENT



*Aggreagate weighing belt is available

20222000

*Guide roller part is available. *SNL bearing type is used.

Valve is available

MIXER POURING CHUTE



*Since the mixer pouring chute is bolted, it provides ease of maintenance.



*0.75 kW single stage *3" valve with butterfly additive pump is available. actuator is available.

CABIN AND AUTOMATION



*Dimension(mm):2000x2000x3000 *PVC System (Insulating Glass) Insulation, Walls polystyrene foam, ceiling glass wool

SETTLEMENT PLAN





*Siemens/ABB Switching material *Omron/PLC *Laptop *Manual Control (Mimic) *Air conditioner: Available (9000 btu)


*Fully automatic operating system *Weighing indicator very useful and easy interface *Software (Cabiness) *Preparation and printing of requested reports

*Dalgakiran compressor is available.


TRANSPORT PLAN

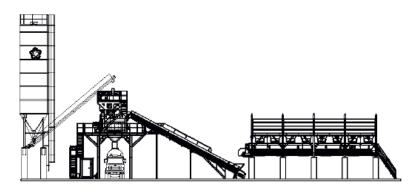







0 FOOT OPEN TOP CONTAINER (2)





40 FOOT OPEN TOP CONTAINER (4)



CONTACT US!

UMMAN A.Ş.

Phone : +90 312 394 19 9
Fax: +90 312 394 19 94

