

SPECIFICATIONS UNIT **Plant Capacity** m³/h 160 2 Mixer Specifications m³/h Dry Filling Volume 6000 Liter **Mixer Specifications** 4000 Compacted Concrete Liter 2x75 Motor Power kW Aggregate Weighing Capacity 6 m^3 Cement Weighing Capacity kg 2200 **Weighing Bin Capacity** Water Weighing Capacity kg 1500 Additive Weighing Capacity kg 20 Piece 4-5 Aggregate Compartments **Aggregate Bin** Bin Capacity 20-30 Aggregate Weighing Capacity kg 9000 mm Width 1200 **Transfer Belts** Length 35000 kW Motor Power 55 Ø 323 Diameter **Cement Screw Conveyor** mm Length 11500 kW Motor Power 18 bar 6-8 Pressure Liter 600 Air Tank **Air Compressor** L/dk 1657 Store House kW 7,5 Motor Power Weight ton 65 kW **Total Power** 275 **Transport Type** 5 Container



HASANKEYF STATIONARY 160 M³ CONCRETE **BATCHING PLANT**







*The front surface reducer part of the mixer can be opened easily. In this case, maintenance operations can be carried out more easily.





*Planetary reducer is used. *2*75 kW motor is used.





*Mixer SKF brand automatic and manual lubrication is available.



stop button that may occur switches are available. regarding the mixer.





*There is an emergency *3 pieces telemechanical *Hydraulic unit is available.




















*Mixer wear-resistant parts are made of Ni-hard material.



*Mixer,mixer and scraper arm group is made of Ni-hard material.



*Mixer bearing part is available.



*Mixer lower pouring chute is available.



*Mixer upper cover part is available.

OUR TRANSFER CONVEYOR QUALITY

JOK TRANSPER CONVETOR QUALITY



*Drum coating is available.



*KR type reducer is used.



*Pear-shaped gearbox available.



*55 kW motor is used.



*Guide roller part is available.



*SNL bearing type is used.



*Rope switch is used.



*Galvanized coating available.














OUR WEIGHING LAYER QUALITY

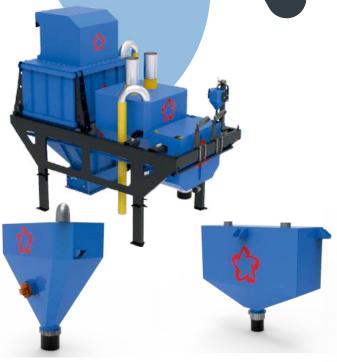



*Pnömatik kontrollü piston mevcuttur.

*Water weighing bin is available. *Katkı tartı bunkeri mevcuttur.





*Vibromotor is available.






*The valves with flap and actuators are available

*The valves with flap and actuators are available

*1" ball valve with actuator is available.

OUR AGGREGATE BIN QUALITY





*Aggregate bin covers are available.



*Aggreagate weighing bin is available





*Aggregate pouring chute is available.



*Vibromotor is available.




























*Drum coating is available.*KR type reducer is used.*Rope switch is used.



OUR PLANT EQUIPMENT



*Guide roller part is available. *SNL bearing type is used.

MIXER POURING CHUTE



*Since the mixer pouring chute is bolted, it provides ease of maintenance.



additive pump is available. actuator is available.



*0.75 kW single stage *3" valve with butterfly



*Dalgakiran compressor is available.

CABIN AND AUTOMATION



*Dimension(mm):2000x2000x4000 *PVC System (Insulating Glass) Insulation, Walls polystyrene foam, ceiling glass wool



*Laptop

*Siemens/ABB Switching material *Omron/PLC

*Manual Control (Mimic)

*Air conditioner: Available (9000 btu)







*Fully automatic operating system *Weighing indicator very useful and easy interface

*Software (Cabiness)


*Preparation and printing of requested


SETTLEMENT PLAN



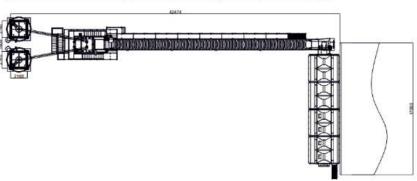

TRANSPORT PLAN





12000 48 FOOT OPEN TOP CONTAINER (5)









