

**SPECIFICATIONS** UNIT **Plant Capacity** m³/h 200 Mixer Specifications m<sup>3</sup>/h 5 Dry Filling Volume 7500 Liter **Mixer Specifications** Compacted Concrete 5000 Liter 2x110 Motor Power kW Aggregate Weighing Capacity 8 Cement Weighing Capacity kg 2500 **Weighing Bin Capacity** Water Weighing Capacity kg 1750 Additive Weighing Capacity kg 20 Piece Aggregate Compartments 4-5 **Aggregate Bin** Bin Capacity 20-30 Aggregate Weighing Capacity kg 12000 mm Width 1200 **Transfer Belts** Length 35000 kW Motor Power 55 Ø 323 Diameter **Cement Screw Conveyor** mm Length 11500 kW Motor Power 18.5 bar 6-8 Pressure Liter 600 Air Tank **Air Compressor** L/dk 1657 Store House kW 7,5 Motor Power Weight ton 70 kW **Total Power** 315 **Transport Type** 6 Container



KÜLTEPE STATIONARY 200 M³ CONCRETE **BATCHING PLANT** 







\*The front surface reducer part of the mixer can be opened easily. In this case, maintenance operations can be carried out more easily.





\*Planetary reducer is used. \*2\*110 kW motor is used.





\*Mixer SKF brand automatic and manual lubrication is available.



stop button that may occur switches are available. regarding the mixer.





\*There is an emergency \*3 pieces telemechanical \*Hydraulic unit is available.





















\*Mixer wear-resistant parts are made of Ni-hard material.



\*Mixer,mixer and scraper arm group is made of Ni-hard material.



\*Mixer bearing part is available.



\*Mixer lower pouring chute is available.



\*Mixer upper cover part is available.

## **OUR TRANSFER CONVEYOR QUALITY**





\*Drum coating is available.



\*KR type reducer is used.



\*Pear-shaped gearbox available.



\*55 kW motor is used.



\*Guide roller part is available.



\*SNL bearing type is used.



\*Rope switch is used.



\*Galvanized coating available.














# **OUR WEIGHING LAYER QUALITY**

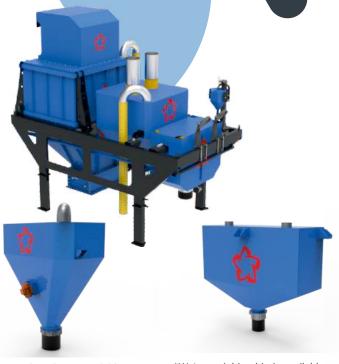



\*Aggregate weighing bin is available. \*Cement weighing bin is available.

\*Pnömatik kontrollü piston mevcuttur.

\*Water weighing bin is available. \*Katkı tartı bunkeri mevcuttur.





\*Vibromotor is available.



\*The valves with flap and actuators are available



\*1" ball valve with actuator is available.

\*The valves with flap and actuators are available

# **OUR AGGREGATE BIN QUALITY**





\*Aggregate bin covers are available.



\*Aggreagate weighing bin is available





\*Aggregate pouring chute is available.



\*Vibromotor is available.



\*Pneumatic controlled piston available.

























\*Drum coating is available.\*KR type reducer is used.\*Rope switch is used.



**OUR PLANT EQUIPMENT** 



\*Guide roller part is available. \*SNL bearing type is used.

### **MIXER POURING CHUTE**



\*Since the mixer pouring chute is bolted, it provides ease of maintenance.



additive pump is available. actuator is available.



\*0.75 kW single stage \*3" valve with butterfly



\*Dalgakiran compressor is available.

#### **CABIN AND AUTOMATION**



\*Dimension(mm):2000x2000x4000 \*PVC System (Insulating Glass) Insulation, Walls polystyrene foam, ceiling glass wool



\*Siemens/ABB Switching material \*Omron/PLC \*Laptop \*Manual Control (Mimic) \*Air conditioner: Available (9000 btu)





#### **SETTLEMENT PLAN**

