



UMMANNAK

Plant Capacity

SPECIFICATIONS

Weighing Bin Capacity

	UNIT	
Cement Weighing Capacity	m ³ /h	80
Water Weighing Capacity	kg	1500
Additive Weighing Capacity	2" flowmeter controlled	
Aggregate Compartments	1" flowmeter controlled	

Aggregate Bin

Bin Capacity	Pieces	4
Aggregate Weighing Capacity	m ³	10
	kg	3000

Transfer Belts

Width	mm	800
Length	mm	10000
Motor Power	kW	15

Cement Discharging Screw Conveyor

Diameter	∅	273
Length	mm	4000
Motor Power	kW	7,5

Air Compressor

Pressure	bar	6-8
Air Tank	Litre	600
Store House	Litre	1657
Motor Power	kW	7,5

Weight

	Ton	9
--	-----	---

Total Power


	kW	45
--	----	----

Transport Type


	3 Container	
--	-------------	--



SIDE STATIONARY 80 M³ DRY TYPE CONCRETE BATCHING PLANT (SIDE)

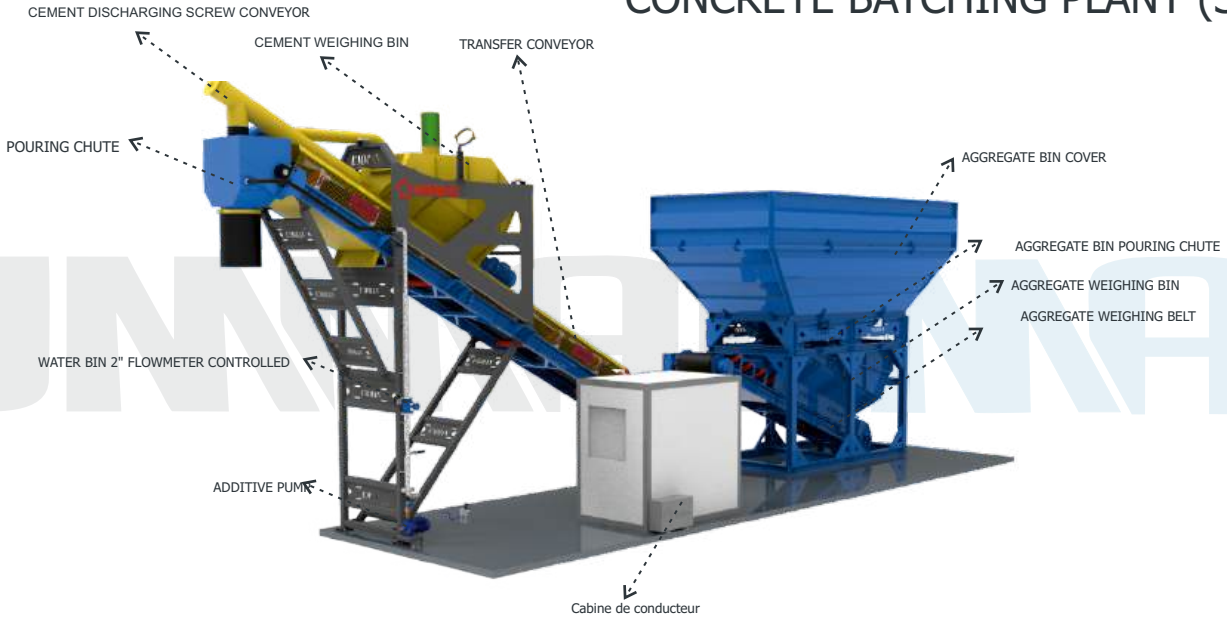

OUR WEIGHING LAYER QUALITY

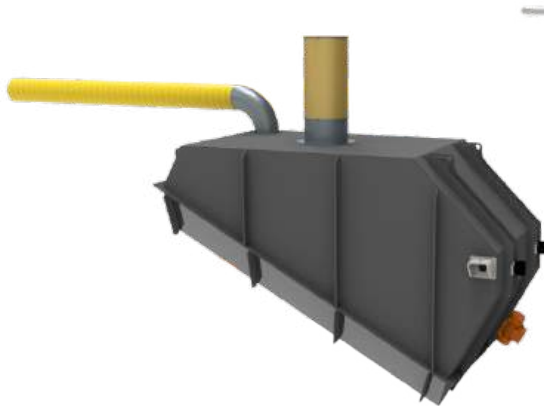

*Cement weighing bin is available.



*Vibromotor is available.



*0.75 kW single stage additive pump is available.



*2" butterfly actuated valve available.
* 2" flowmeter controlled.



*Cement discharging screw conveyor is available.

*Plumbing is available.

CONTACT US!

UMMAN A.S.
Address: İvedik O.S.B 1341. Cad.
No:71 Yenimahalle / ANKARA

Phone : +90 312 394 19 90
Fax: +90 312 394 19 94
E-mail: info@umman.com.tr
Web: www.umman.com.tr



TRANSFER CONVEYOR QUALITY



*Drum coating is available.



*KR type reducer is used.



*Rope switch is used.



*Guide roller part is available.



*SNL bearing type is used.



*The transfer conveyor has an upper cover available.

AGGREGATE BUNKER QUALITY



*Aggregate bin covers are available.



*Aggregate weighing bin is available



*Aggregate pouring chute is available.



*Pneumatic controlled piston available.



*Vibromotor is available.



*Vibromotor is available.



*Vibromotor is available.




*Valve available.

CONTACT US!

UMMAN A.S.
Address: İvedik O.S.B 1341.Cad.
No:71 Yenimahalle / ANKARA

Phone : +90 312 394 19 90
Fax: +90 312 394 19 94
E-mail: info@umman.com.tr
Web: www.umman.com.tr



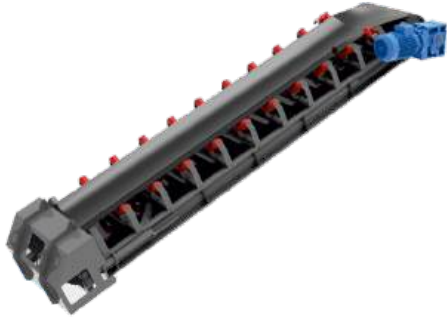

*Aggregate weighing belt is available

*Drum coating is available.



*7.5 kW, 88 rpm KR 672 locked reducer used.



*Rope switch is used.



*Guide roller part is available. *SNL bearing type is used.



POURING CHUTE




*Since the pouring chute is bolted, it is easy to maintain.

OUR PLANT EQUIPMENT



*Dalgakiran kompresör mevcuttur.

CABIN AND AUTOMATION



*Dimension(mm):1500x2000x2200
*PVC System (Insulating Glass) Insulation,
Walls polystyrene foam, ceiling glass wool






*Siemens/ABB Switching material
*Omron/PLC
*Laptop
*Manual Control (Mimic)
*Air conditioner: Available (9000 btu)




*Fully automatic operating system
*Weighing indicator very useful and easy interface
*Software (Cabiness)
*Preparation and printing of requested reports

SETTLEMENT PLAN

TRANSPORT PLAN

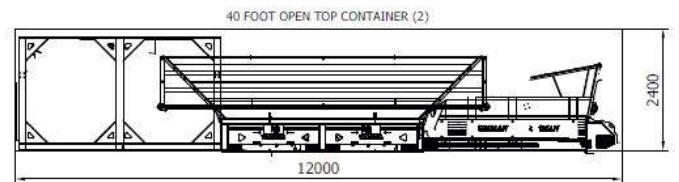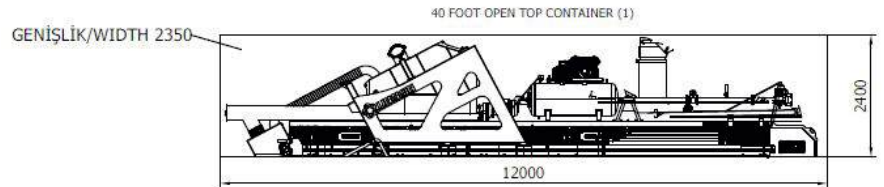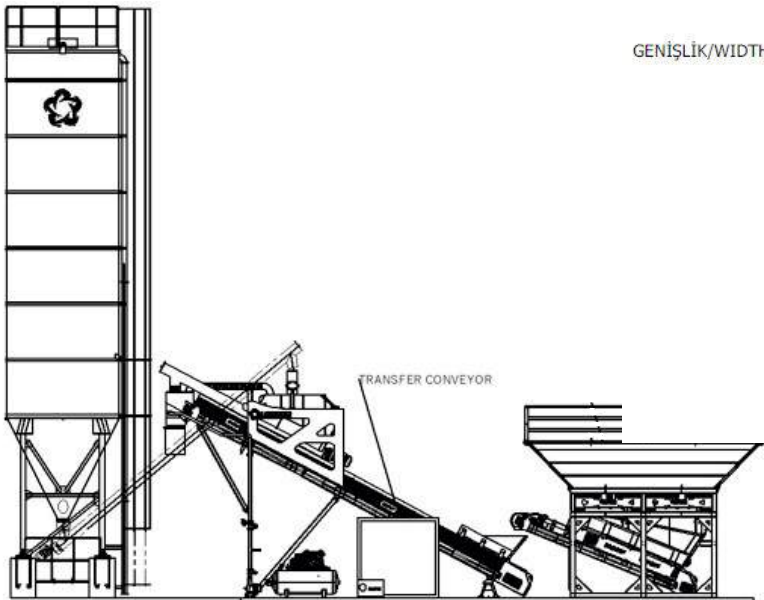

*Shipping is available in 2 40' open top containers.

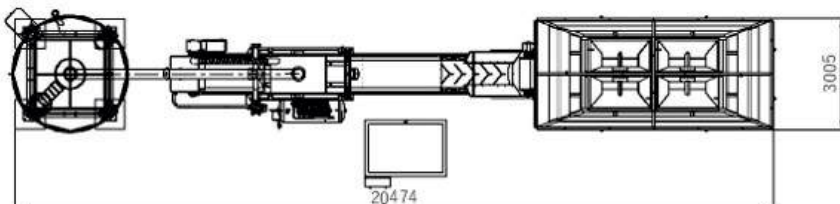

CONTACT US!

UMMAN A.S.
Address: İvedik O.S.B 1341.Cad.
No:71 Yenimahalle / ANKARA

Phone : +90 312 394 19 90
Fax: +90 312 394 19 94
E-mail: info@umman.com.tr
Web: www.umman.com.tr



